

LipuSmart-P-OB Basic stage


Product information for the product group



Item Technical Data 3557.36.00

| Nominal capacity | Nominal width | Contents | | | Key data | | | Weight | |
|------------------|---------------|-------------|--------------|---------|---------------------|------|-----|--------|------|
| | | Sludge trap | Grease store | Overall | Type | P2 | To | Empty | Full |
| | | [l] | [l] | [l] | | [kW] | [l] | [kg] | [kg] |
| NS 7 | DN 150 | 800 | 400 | 1600 | Pumpenset 4,0 kW | 4 | 235 | 340 | 1940 |

Dimensions

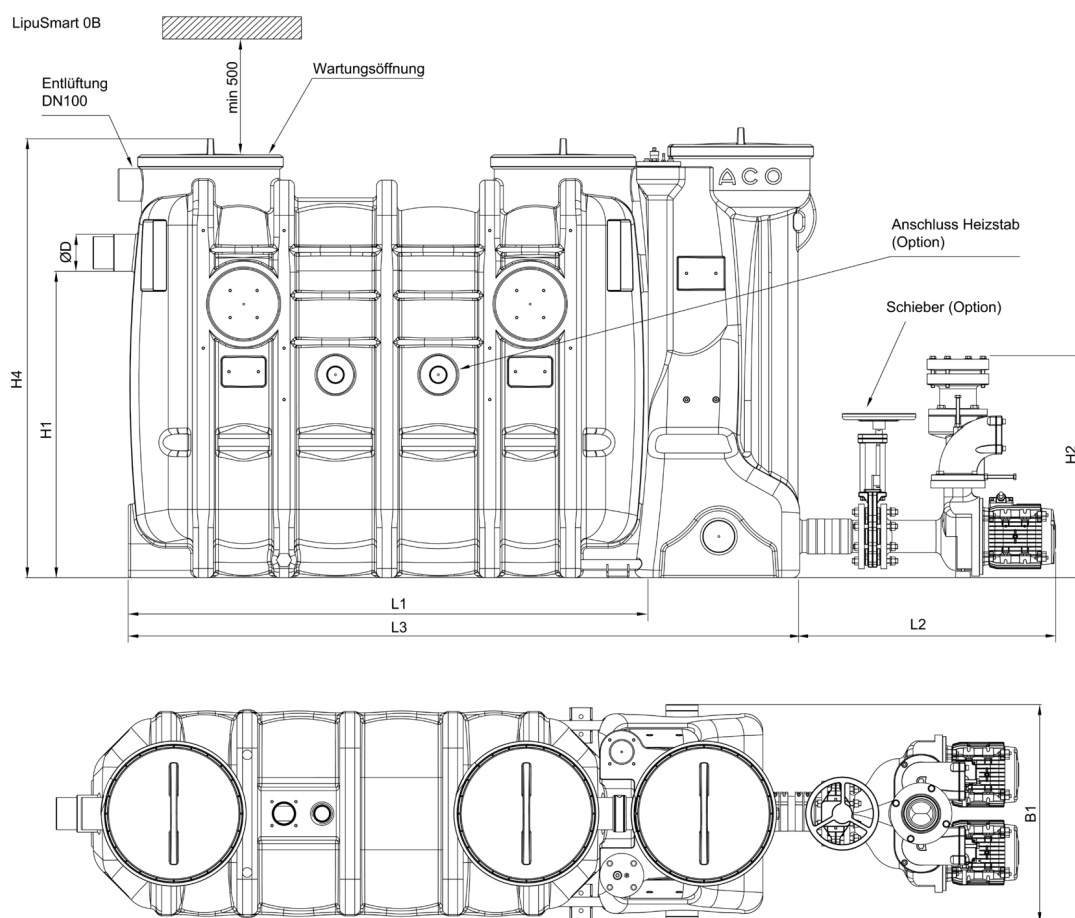

| Nominal capacity | Dimensions | | | | | | | | | | | | |
|------------------|------------|------|------|------|------|------|------|------|------|------|------|------|------|
| | L1 | L2 | L3 | L4 | L5 | H1 | H2 | H3 | H4 | W1 | W2 | B3 | D |
| | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] |
| NS 7 | 1960 | 835 | 2487 | 300 | 680 | 1250 | 753 | 1880 | 1700 | 960 | 1130 | 1180 | 160 |

Accessories

| | Description | Used with | Description | Item number |
|---|---|---|---|-------------------|
|  | Grease layer thickness measuring device | <ul style="list-style-type: none"> ■ LipuJet-P <ul style="list-style-type: none"> □ Oval NS 1 – 10 □ Round NS 2 – 20 ■ LipuJet-S <ul style="list-style-type: none"> □ Oval NS 1 – 10 □ Round NS 2 – 20 ■ LipuSmart-P <ul style="list-style-type: none"> □ Oval NS 1 – 10 | <ul style="list-style-type: none"> ■ For electronic measurement of layer of grease ■ Suitable for liquid and/or congealing grease ■ Measuring device with plug and used connecting cable, length: 3 m ■ With two voltage-free changeover contacts to display full warning (80 %) and advance warning of fill level (50 %) ■ With visual display of fill level ■ With heated probe rod to increase reliability of operation ■ Operating voltage: 230VAC/5 VA ■ Max consumption approx. 12 W ■ Weight: 2.8 kg | 3300.11.50 |
| | Grease layer thickness measuring device Multi Control | | <ul style="list-style-type: none"> ■ To determine the disposal intervals of grease separators ■ Suitable for liquid and/or hardened fats ■ Delineation with colour-touch-panel ■ Continuous measure in percent ■ With integrated SD-card (4GB) for recording of the measuring process ■ With headed sounding stick (temperature is adjustable) to increase the operation safety ■ Three free of potential contacts for output of pre-alarm (adjustable), full-alarm (adjustable) and error ■ Measuring stick with adjusting scale ■ Delineation with plug-in cable connection, 3 m ■ Service voltage: 100 240VAC 50/60 Hz, 2 A ■ Power: ca. 43 W | |
|  | | LipuJet-P LipuJet-S LipuSmart-P | Weight: 2.7 kg | 3300.12.50 |

| | Description | Used with | Description | Item number |
|---|----------------------|-----------|-------------------|-------------------|
|  | Smell neutralisation | | ■ Weight: 36.2 kg | 7980.80.00 |

You can find further accessories under → [/35573600](#)